


Datamate J-Tek Connectors

Male Crimp Kit

- Part numbers are for a complete kit of a housing and the applicable number of contacts.
- Jackscrews are assembled where specified.
- Crimp contacts supplied loose.
- Crimp contacts are rear insertable and replaceable.
- Spare contacts are available.

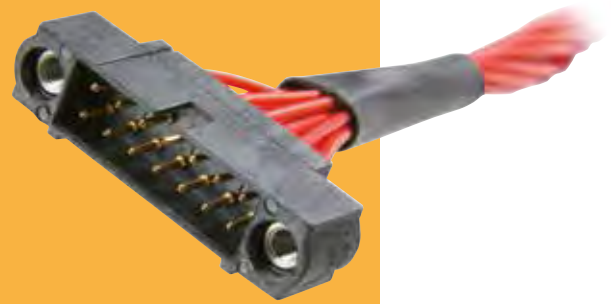

DATAMATE J-TEK

WITHOUT JACKSCREWS	WITH JACKSCREWS												
<table border="1" style="background-color: #f4a460; width: 100%;"> <thead> <tr> <th colspan="2">CALCULATION</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>$B + 12$</td> </tr> <tr> <td>B</td> <td>Total no. of contacts - 2</td> </tr> <tr> <td>C</td> <td>$B + 7$</td> </tr> </tbody> </table>		CALCULATION		A	$B + 12$	B	Total no. of contacts - 2	C	$B + 7$				
CALCULATION													
A	$B + 12$												
B	Total no. of contacts - 2												
C	$B + 7$												
TOOLS	WIRE STRIPPING DETAILS												
<p>Recommended Crimp Tool - M22520/2-01</p> <p>Positioner - Z80-193</p> <p>Contact Insertion/Removal Tool - Z80-280</p> <ul style="list-style-type: none"> Spare contacts shown on following pages. Instruction sheets available at www.harwin.com/instructions. 													
HOW TO ORDER													
<p>M80 - 5XX XX 05</p>													
SERIES CODE	FINISH												
<table border="1" style="width: 100%;"> <thead> <tr> <th colspan="2">TYPE</th> </tr> </thead> <tbody> <tr> <td>570</td> <td>Large Bore (22 AWG), without Jackscrews</td> </tr> <tr> <td>571</td> <td>Small Bore (24-28 AWG), without Jackscrews</td> </tr> <tr> <td>560</td> <td>Large Bore (22 AWG), with Jackscrews</td> </tr> <tr> <td>561</td> <td>Small Bore (24-28 AWG), with Jackscrews</td> </tr> </tbody> </table>	TYPE		570	Large Bore (22 AWG), without Jackscrews	571	Small Bore (24-28 AWG), without Jackscrews	560	Large Bore (22 AWG), with Jackscrews	561	Small Bore (24-28 AWG), with Jackscrews	<table border="1" style="width: 100%;"> <tbody> <tr> <td>05</td> <td>Gold</td> </tr> </tbody> </table>	05	Gold
TYPE													
570	Large Bore (22 AWG), without Jackscrews												
571	Small Bore (24-28 AWG), without Jackscrews												
560	Large Bore (22 AWG), with Jackscrews												
561	Small Bore (24-28 AWG), with Jackscrews												
05	Gold												
<table border="1" style="width: 100%;"> <thead> <tr> <th>TOTAL NO. OF CONTACTS</th> </tr> </thead> <tbody> <tr> <td>04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50</td> </tr> </tbody> </table>		TOTAL NO. OF CONTACTS	04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50										
TOTAL NO. OF CONTACTS													
04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50													

All dimensions in mm.