

6

5



4

3

2

1

<b>MATERIAL NUMBER</b>	<b>ENGINEERING NUMBER</b>	<b>FINISHED LENGTH</b>
1300310026	81612	0.31M +19.1mm -0 [12" +0.75" -0]

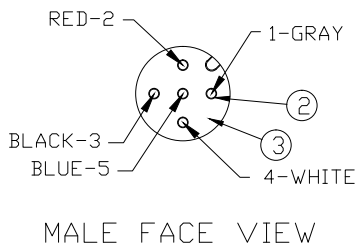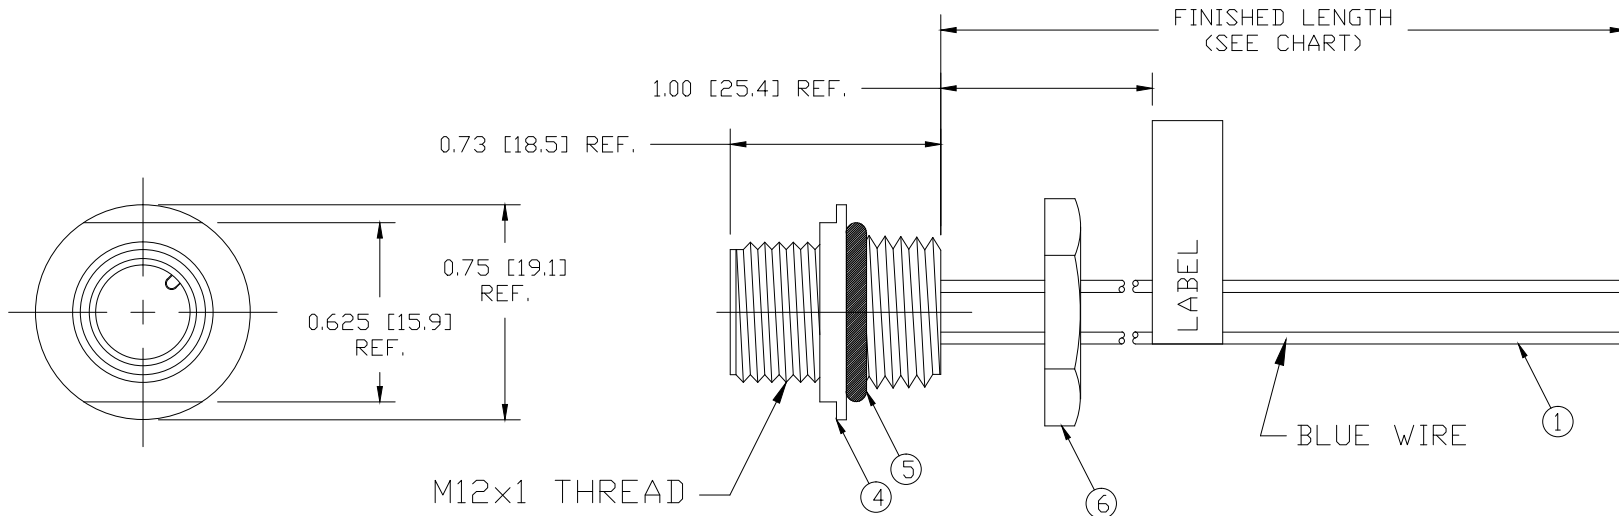

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 80°C

ITEM	COMPONENT	MATERIAL	FINISH
1	WIRE	PVC	SEE PINOUT
2	CONTACT PIN	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	NYLON	BLACK
4	RECEPTACLE SHELL	ALUMINUM	BLACK
5	O-RING	NITRILE	BLACK
6	PANEL NUT	STEEL	ZINC PLATED

CORRECT PINOUT	EC NO: WNA2011-0229	7/1/11
	DRWN: LHARTMAN	
	CHKD: VOU	
	APPR: JFMURPHY	2009/08/28
REV	B	

QUALITY SYMBOLS
$\nabla=0$
$\nabla C=0$

GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±.005
2 PLACES	±0.13	±.010
1 PLACE	±0.25	±.020
ANGULAR ±1/2°		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE	
IN/MM	
DRAWN BY	DATE
BWOODMAN	2009/08/28
CHECKED BY	DATE
BWOODMAN	2009/08/28
APPROVED BY	DATE
JFMURPHY	2009/08/28
MATERIAL NO.	
SEE CHART	
SIZE	A

SCALE	NTS	DESIGN UNITS	INCH	THIRD ANGLE PROJECTION
TITLE				
MICRO-CHANGE RECEPTACLE				
5 POLE MALE STRAIGHT				
#22/1 PVC WIRE LEADS				
MOLEX INCORPORATED				
DOCUMENT NO.				SHEET NO.
SD-130031-001				1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

6

5

4

3

2

1

E

E

D

D

C

C

B

B

A

A