
### **CUSTOMER DRAWING**

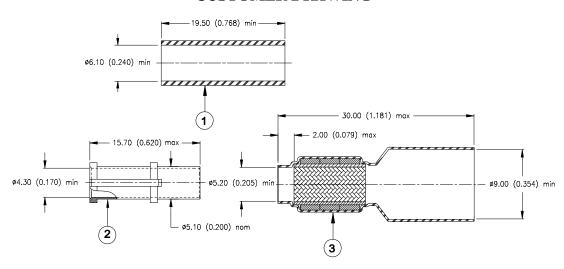


#### **MATERIALS**

- 1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
- 2. FERRULE: Copper alloy with a suitable plating (see below for plating information).
- 3. SOLDERSHIELD DEVICE:
  - Heat-shrinkable insulation sleeve, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
  - Copper braid pre-tinned with Sn96Ag4 solder alloy with activated rosin flux.
  - Solder Preform: Sn96Ag4 solder alloy, with activated rosin flux.

## **APPLICATION**

- 1. These parts are used on Tyco Electronics/Raychem Hexashield adaptors.
- 2. Cable Type: Single or multi-conductors shielded cable: Raychem Spec 44 or Spec 55, single braid. (tin, silver or nickel-plated copper braid)
- 3. Temperature range:  $-65^{\circ}$ C to  $+175^{\circ}$ C.
- 4. For all other application, contact Tyco Electronics/Raychem technical service.

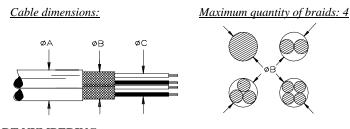

| Cable Dimensions |         |         |         |         |  |  |  |
|------------------|---------|---------|---------|---------|--|--|--|
| øΑ               |         | øB      |         | øС      |  |  |  |
| Min.             | Max.    | Min.    | Max.    | Max.    |  |  |  |
| 4.30             | 8.90    | 3.50    | 6.20    | 4.20    |  |  |  |
| (0.169)          | (0.350) | (0.138) | (0.244) | (0.165) |  |  |  |

# PART NUMBERING

HET-A-04X → Ferrule Plating:

B: Olive drab cadmium in accordance with SAE-AMS-QQ-P-416, over a suitable underplate to withstand 500 hours of salt spray test.

C: Electroless nickel conforming to SAE-AMS-C-26074 Class 3, Grade B.

#### INSTALLATION

See Tyco Electronics/Raychem installation procedure RPIP-696-00.

| <b>Tyco Electronics</b>  |                        |   | Tyco Electronics<br>300 Constitution Dr<br>Menlo Park, CA<br>94025, U.S.A. | TITLE: FERRULE AND SOLDERSHIELD DEVICE FOR HEXASHIELD ADAPTERS |           |        |
|--|------------------------|---|--|--|-----------|--------|
| Unless otherwise specified dimensions are in millimeters.  [Inches dimensions are shown in brackets] |                        | Raychem   | DOCUMENT NO.:<br>HET-A-04X   |  |           |        |
| TOLERANCES:  | ANGLES: N/A            | Tyco Electronics reserves the right to                                |  |  |           |        |
| 0.00 N/A   |                        |   | ng at any time. Users  | REV:   | DATE:     |        |
| 0.0 N/A<br>0 N/A   | ROUGHNESS<br>IN MICRON | should evaluate the suitability of the product for their application. |  | A  | 11-May-07 |        |
| DRAWN BY:  | CAGE CODE:             | REPLACES:   | ECO NUMBER:  | SCALE:   | SIZE:     | SHEET: |
| K.YEE  | 06090                  | D030535   | 07-010934  | NTS  | A         | 1 of 1 |