

Ratings

Voltage: 300 V
 Temperature: 80 °C
 Flammability: VW-1, FT1

Conductor

Conductor count: 2
 Gauge: 24 AWG, 0.22 mm²
 Material: tinned copper strands
 Stranding: $\varnothing 0.16 \times 11$
 Resistance at 20 °C: 95 ohm/km maximum

Insulator

Material: SRPVC, 80 °C
 Color: black, red
 Outer diameter: $\varnothing 1.2 \pm 0.10$ mm
 Thickness: 0.23 mm minimum average
 Style: UL 1061

Outer jacket

Material: PVC, 80 °C
 Color: gray
 Diameter: $\varnothing 4 \pm 0.20$ mm
 Thickness: 0.76 mm minimum average



Wire marking: E339579 UL AWM STYLE 2464 24AWG 80°C
 300V VW-1 --- cUL AWM I A 80°C 300V FT1 TENSILITY

Tests

Tensile strength: 1.05 kgf/mm²
 After aging at 113 ± 2 °C for 7 days:
 Minimum tensile strength 70 % original
 Minimum elongation 65 % original
 Flexibility: no observed cracking
 Heat shock: 121 ± 1 °C /1 hour, no observed degradation
 Deformation: 121 ± 1 °C /1hour, ≤ 50 %
 Cold bend: -10 ± 2 °C /1 hour, no observed cracking
 Dielectric: 2000 Vac for 1 minute without breakdown

Use:

Internal wiring or external interconnection of electronic equipment

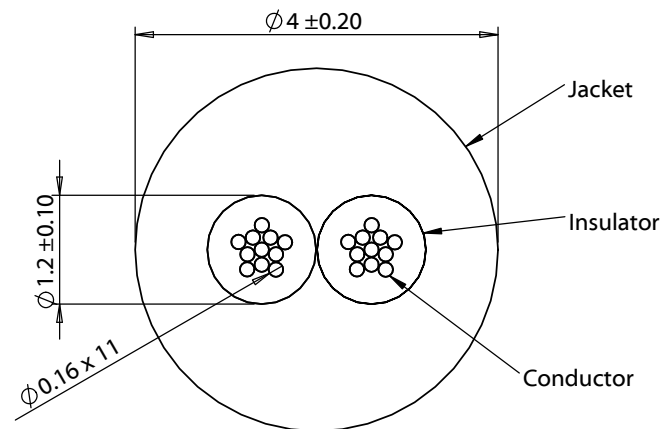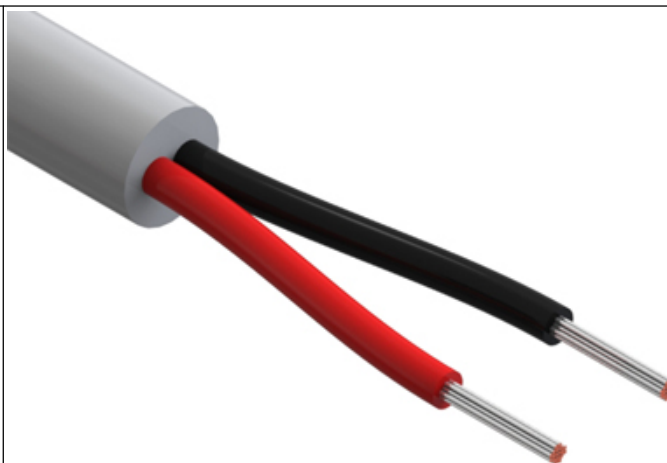

REVISION	DATE	DESCRIPTION	PREPARED:	NOTES	TENSILITY 20802 Sockeye Place #130 Bend, OR 97701 USA tel 541.323.3228 fax 541.323.4202 800 877.670.7118 www.tensility.com								
A	1/22/2016	Initial release		RoHS and REACH compliant									
			VERIFIED:	Function test: no open, no short circuit, no intermittent	<table border="1"> <tr> <td>SIZE</td> <td colspan="2">PART NUMBER</td> </tr> <tr> <td>A</td> <td colspan="2">30-00694</td> </tr> </table>			SIZE	PART NUMBER		A	30-00694	
SIZE	PART NUMBER												
A	30-00694												
			DIMENSIONS ARE IN MILLIMETERS	Meets UL appliance wiring standard 758									
			TOLERANCES: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	DESCRIPTION: Wire, 2C TS, 24 AWG, UL2464, 300V, 80C, 4.0 mm, VW-1, PVC, gray	SCALE: 12:1	SHEET 1 OF 1							