EXB50 Dual Series ART



Dual positive output

DC-DC CONVERTERS

50 W High Efficiency DC-DC Converters

- Two independently regulated positive outputs
- Each output offers ultra-wide output voltage trim range
- High efficiency topology, 89% typical
- Approved to IEC60950, UL/cUL1950
- Operating ambient temperature of -40 °C to +70 °C (natural convection)
- No minimum load on either output
- Complies with ETS 300 019-1-3/2-3 and ETS 300 386-1
- Available RoHS compliant

The EXB50 Dual is a 50W independently regulated dual output dc-dc converter specifically designed to meet the power needs of low voltage silicon. Housed in an open-frame package with an industry standard 1/2 brick footprint, the EXB50 Dual can deliver up to 8.5 A from either output, and up to 11 A in total, at temperatures of up to 70 °C under natural convection. With some forced air and/or reduced ambient temperatures, the EXB50 can deliver up to 8.5 A from either output, and up to 17 A in total. The converter is primarily intended for the networking, telecoms and wireless markets, where small size, lower output voltages with higher currents, low profile and high efficiency are all key demands. Product features include wide output trim and remote on/off. Overvoltage, short circuit and overtemperature protection combines to make the EXB50 Dual a very robust and flexible product.









2 YEAR WARRANTY

All specifications are typical at Vin = 48 V, Io1 = 5 A, Io2 = 5 A, Tamb = 25 °C unless otherwise stated

SPECIFICATIONS

OUTPUT SPECIFICATIONS

Voltage adjustability	EXB50-48D3V3-1V8 EXB50-48D05-3V3J	
Voltage accuracy	Both outputs	±0.5% max.
Line regulation	Low line to high line Low line to high line	
Load regulation	Full load to no load	±0.5%
Minimum load	Both outputs	0%
Ripple and noise 20 MHz bandwidth	Both outputs	150 mV pk-pk max. 30 mV rms max.
Transient response peak dev. settling time	3 A to 5 A (1 A/10 μ and back	s) 150 mV 400 µs
Short circuit protection	EXB50-48D3V3-1V8 EXB50-48D05-3V3J	

INPUT SPECIFICATIONS

Input voltage range	48 Vin nominal	36-75 Vdc
Input current	No load Remote OFF	100 mA max. 4 mA max.
UVLO turn ON voltage UVLO turn OFF voltage	All inputs All inputs	34 V typ. 33 V typ.
Active high remote ON/O Logic compatibility ON OFF (See Note 7)	Ope	n collector ref. to -input cuit voltage or >3.2 Vdc <0.4 Vdc
Active low remote ON/OF Logic compatibility ON	•	n collector ref. to -input 0.4 Vdc max.

International Safety Standard Approvals



OFF (See Note 7)

UL/cUL CAN/CSA 22.2 No. E174104 UL 60950 File No. E174104

TÜV Product Service (EN60950) Certificate No. B 01 09 38572 024 CB report and certificate to IEC60950

Open circuit voltage or >3.2 Vdc

EMC CHARACTERISTICS

Immunity: ESD air
Radiated field enclosure Surges indoor signal Conducted (dc power) Conducted (signal) Input transients EN61000-4-3 10 V/m (NP) EN61000-4-5 500 V (RP) EN61000-4-6 10 V (NP) EN61000-4-6 10 V (NP) ETS 300 132-2, ETR 283

GENERAL SPECIFICATIONS

Efficiency		89% typ.
Basic insulation	Input/output	1500 Vdc
Input fuse 48 V	(See Note 2)	4 A slow blow HRC
Switching frequency (fixed)	EXB50-48D3V3-1V8 EXB50-48D05-3V3	
Approvals and standards		IEC60950 UL/cUL1950
Material Flammability		UL94V-0
Weight		42 g (1.48 oz)
MTBF	MIL-HDBK-217	177,362 hours

ENVIRONMENTAL SPECIFICATIONS

Thermal performance (See Notes 4 and 5)	Operating ambient temperature Non-operating	-40 °C to +100 °C, see curves -40 °C to +120 °C
ETS 300 019-2-3		Classes T3.1 to T3.5
Air temperature	Low: IEC 68-2-1 High: IEC 68-2-2 Change: IEC 68-2-1	-40 °C +70 °C 4 -40 °C to +70 °C
Relative humidity	IEC 68-2-56 IEC 68-2-30	10% to 100% RH

File Name: exb50d.pdf Rev (02): 30 Nov 2005

EXB50 Dual Series ART



Dual positive output

DC-DC CONVERTERS 50 W High Efficiency DC-DC Converters

2

For the most current data and application support visit www.artesyn.com/powergroup/products.htm

INPUT	OUTPUT	VOLTAGE	OUTPUT C	URRENT (8)	0\	/P ⁽¹⁾	TYPICAL	MODEL
VOLTAGE	1	2	1	2	1	2	EFFICIENCY	NUMBER (7,9,10)
36-75 Vdc	3.3 V	1.8 V	8.5 A	8.5 A	4.12 V	2.34 V	86.4%	EXB50-48D3V3-1V8J
36-75 Vdc	5 V	3.3 V	7.5 A	7.5 A	6.25 V	4.12 V	89%	EXB50-48D05-3V3J

Notes

- 1 Latching OVP response time is 2 ms (typ.). OVP latch is reset by toggling the control input, or by cycling the input voltage.
- 2 User must provide recommended fuses in order to comply with safety approvals
- 3 Meets both level A and level B conducted emissions only with external components connected before the input pins to the converter.
- 4 Maximum temperature on hotspots not to exceed 110 °C. See Application Note 127 on Artesyn Technologies website www.artesyn.com.
- 5 See the longform datasheet for derating curves.
- For stable operation connect an external output capacitor of at least 100 μF to each output. Recommended capacity AVX TPS series (e.g. TPSD107*010#0100) or equivalents.
- 7 Active low remote ON/OFF, is available. Standard product is active high. Designate with the suffix '-R' e.g. EXB50-48D05-3V3-RJ.
- Maximum total current from the module is 15 A for EXB50-48D05-3V3J and 17 A for EXB50-48D3V3-1V8J with airflow.
- 9 The 'J' suffix indicates that these parts are Pb-free (RoHS 6/6) compliant. TSE RoHS 5/6 (non Pb-free) compliant versions may be available on special request, please contact your local sales representative for details.
- 10 NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at http://www.artesyn.com/powergroup/products.htm to find a suitable alternative.

PROTECTION

Short circuit Continuous

Overvoltage Latching

Thermal 125 °C with automatic recovery


TELECOM SPECIFICATION


Central office interface A

ETS300-132-2 input voltage and current requirements

CAUTION: Hazardous internal voltages and high temperatures. Ensure that unit is not user accessible.

EXTERNAL OUTPUT TRIMMING



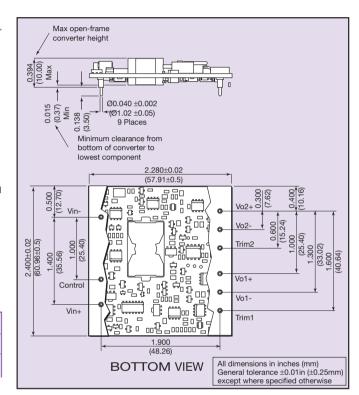

PIN CONNECTIONS			
PIN NUMBER	FUNCTION		
1	- Vin		
2	No Pin		
3	Remote ON/OFF		
4	+ Vin		
5	Vo1 Trim		
6	Vo1 Return		
7	Vo1+		
8	Vo2 Trim		
9	Vo2 Return		
10	Vo2+		

Datasheet © Artesyn Technologies® 2005

The information and specifications contained in this datasheet are believed to be correct at time of publication. However, Artesyn Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.

Please consult our website for the following items: V Application Note V Longform Datasheet

www.artesyn.com