

# Audio Transformer Data/Voice Coupling

# TY-305P

## **Description:**

The TY series transformers are used for a variety of applications including impedance matching, isolation, repeat coil, line balancing, bridging and hybrid circuits.

# Electrical Specifications at 25° C:

Impedance		Max. DC	Тур.	Тур.	Typ. Freq.
(Ohms)		Current	Insertion	Return	Response
Pri	Sec	(mA)	Loss (dB)	Loss (dB)	(dB)
600	600	100	1.5	10	±.5

#### **Designed to meet FCC Part 68**

**Longitudinal Balance:** (FCC 68.310) – 60 dB min. 200 – 1000 Hz

45 dB min. 1000 - 4000 Hz


Dielectric Strength: (FCC 68.304) - 1500VAC

Power Level: -45 dBm to +7 dBm

Frequency Range: Data/Voice = 300 to 3500 Hz


Data = 800 to 3500 Hz


## **Schematic:**



**RoHS Compliance:** As of manufacturing date February 2005, all standard products meet the requirements of 2011/65/EU, known as the RoHS initiative.

\*Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics website for the most current version. For soldering and washing information please see http://www.triadmagnetics.com/faq.html

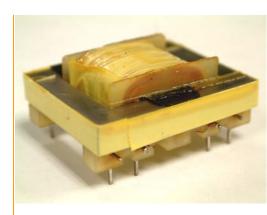

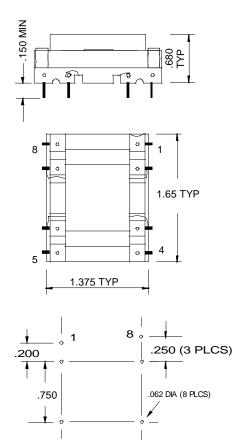

UNIT MOUNTING PATTERN