

RJ45 socket insert - CUC-V04-BU-90 - 1407408

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



RJ45 socket insert, Type: RJ45, IP20, Degree of protection: IP20, Number of positions: 8, CAT5, Material: Copper alloy, Connection method: Solder connection



Key Commercial Data

Packing unit	1 STK
Weight per Piece (excluding packing)	1.000 g
Custom tariff number	85366990
Country of origin	Germany

Technical data

Mechanical characteristics

Standards/specifications	IEC 60603-7
Number of positions	8
Connection profile	RJ45
Insertion/withdrawal cycles	≥ 750
Connection method	Solder connection

Ambient conditions

Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Degree of protection	IP20

Material data

Flammability rating according to UL 94	V0
Housing material	Copper alloy

Electrical characteristics

RJ45 socket insert - CUC-V04-BU-90 - 1407408

Technical data


Electrical characteristics

Number of positions	8
Nominal voltage U_N	50 V
Nominal current I_N	1.5 A
GRP transmission properties	CAT5

Standards and Regulations

Standards/regulations	IEC 60603-7
Flammability rating according to UL 94	V0

Drawings

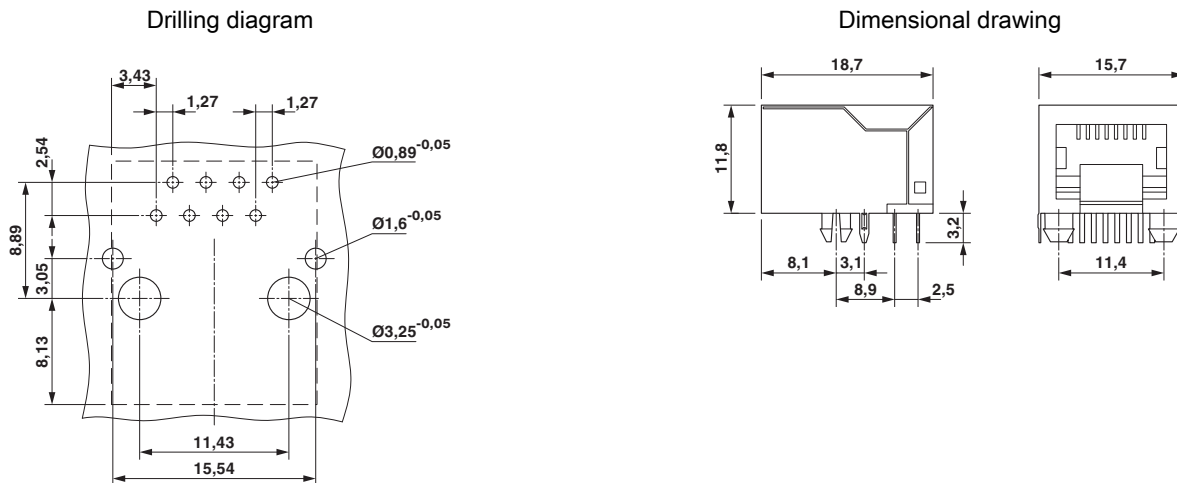

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260708
eCl@ss 7.0	27440312
eCl@ss 8.0	27440205
eCl@ss 9.0	27440205

ETIM

ETIM 3.0	EC001121
----------	----------

RJ45 socket insert - CUC-V04-BU-90 - 1407408

Classifications

ETIM

ETIM 4.0	EC001121
ETIM 5.0	EC000438

UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC B.01742

Accessories

Accessories

Panel mounting frame

Panel mounting frames - CUC-V04-F-POBK-90 - 1407411



Panel mounting frames, Degree of protection: IP65/67, Material: Plastic